


Specifications of Linear Guide A/AL Flange Blocks

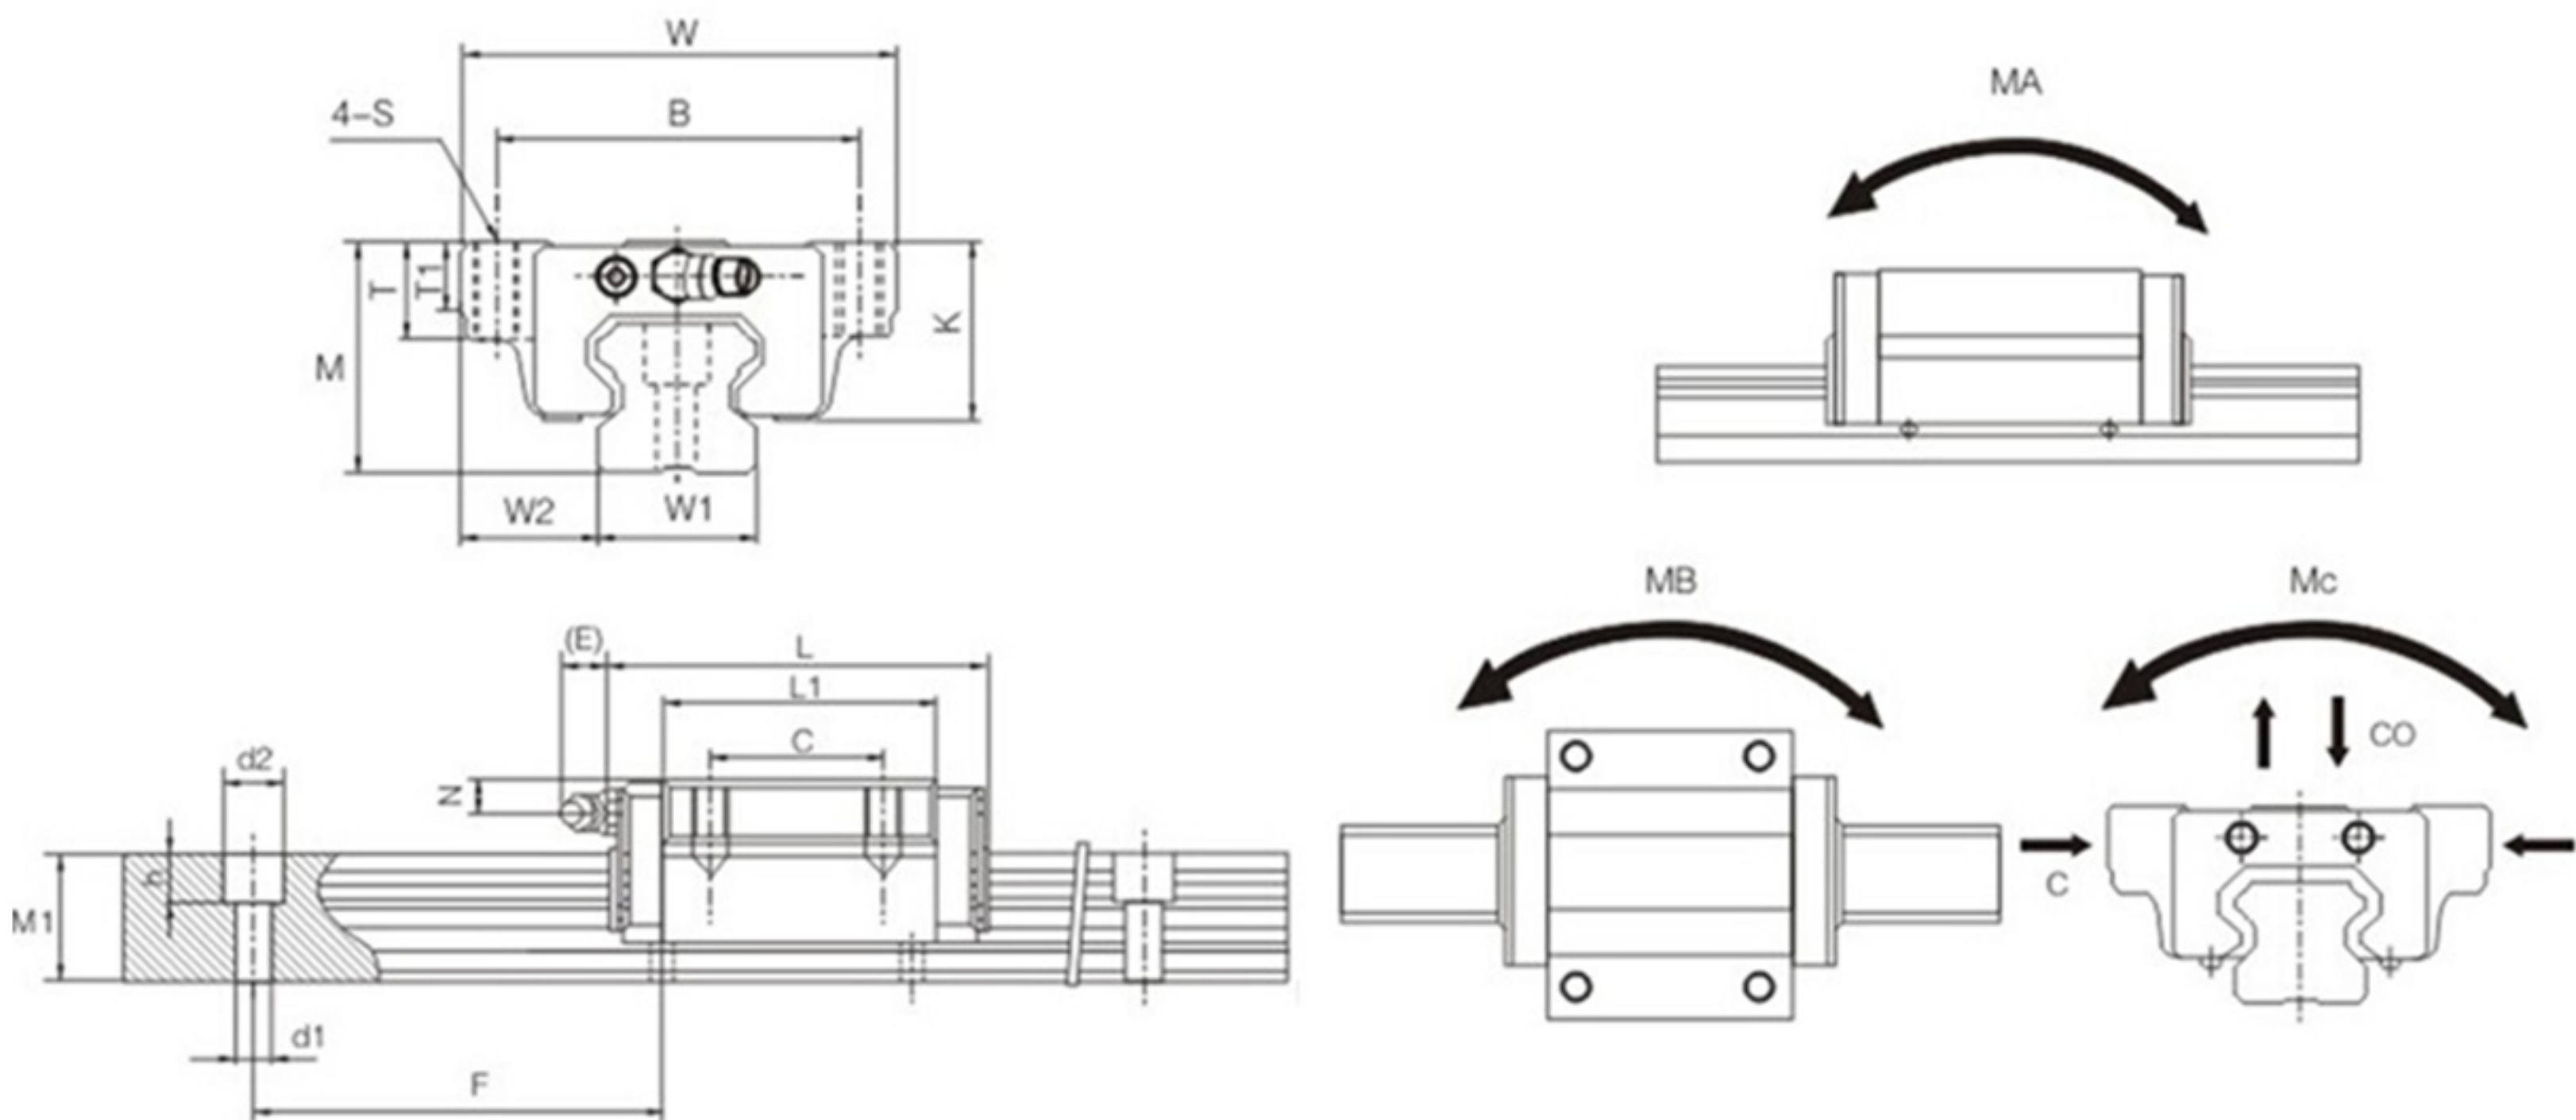

Model Code	Physical			Block Dimension									Fittings for Lubrication	Rail Dimension					Basic Load Rating		Weight	
	Height M	Width W	Length L	B	C	S	L1	T	T1	K	N	E		Width W	W2	Height M1	Pitch F	d1×d2×d3	C (KN)	C0 (KN)	Block (KG)	Rail (KG/M)
NTRH15A	24	47	66	38	30	M5	37.8	7	11	19.3	4.3	5.5	PB1021B	15	16	15	60	4.5 × 7.5 × 5.3	8.33	13.5	0.2	1.5
NTRH20A	30	63	74	53	40	M6	51.3	10	10	26	5	12	B-M6F	20	21.5	18	60	6 × 9.5 × 8.5	13.8	23.8	0.35	2.3
NTRH25A	36	70	83.5	57	45	M8	59.3	16	10	30.5	6	12	B-M6F	23	23.5	22	60	7 × 11 × 9	19.9	34.4	0.59	3.3
NTRH30A	42	90	99.5	72	52	M10	71	18	12	35	7	12	B-M6F	28	31	26	80	9 × 14 × 12	28	46.8	1.1	4.8
NTRH35A	48	100	112	82	62	M10	81	20	14	40.5	8	12	B-M6F	34	33	29	80	9 × 14 × 12	37.3	61.1	1.6	6.6
NTRH45A	60	120	139	100	80	M12	98	25	14	50	10	16	B-PT1/8	45	37.5	38	105	14 × 20 × 17	60	95.6	2.8	11